

RADWIN 2000 Radio Series

Carrier-Class, High-Capacity Sub-6GHz Backhaul Solutions

Product Highlights

- 100 Mbps net throughput
- Native TDM (up to 16 E1/T1s) plus Ethernet
- Multiple frequency bands over single platform (2.3 – 2.4 and 4.9 – 5.9 GHz)
- Superior spectral efficiency at 20MHz channel
- Advanced OFDM and MIMO technologies
- Long range: up to 120 km/75 miles
- Inbuilt mechanisms to mitigate interference

The RADWIN 2000 Radio Series delivers high capacity, extended range and carrier-class performance for IP and TDM networks.


RADWIN 2000 provides native TDM and Ethernet over a single wireless link and incorporates advanced MIMO and OFDM technologies. The flexible multi-band radio delivers 2.3 – 2.4GHz and 4.9 – 5.9GHz frequencies on a single platform and complies with worldwide regulations including FCC, ETSI, IC Canada, WPC India and MII China.

RADWIN 2000

Carrier-Class, High-Capacity Sub-6GHz Backhaul Solutions

Key Benefits


- Carrier-class radio delivering best performance in sub-6GHz bands
- High capacity and long range to meet advanced backhaul requirements
- Easy to install, simple to maintain
- Significant reduction in cost of ownership (reduced CAPEX and OPEX)
- License-exempt solution for quickest time-to-market
- Enabling seamless migration from TDM to IP

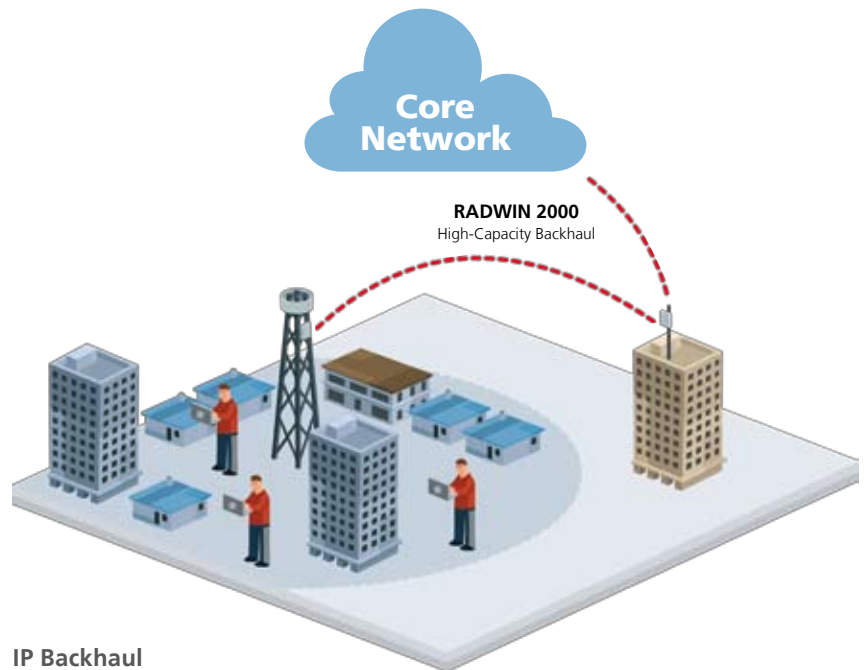

IP Backhaul

RADWIN 2000 is the solution of choice for carriers looking for affordable backhaul solutions. With ever increasing demand for broadband services, carriers require high-capacity, cost-effective backhaul solutions. RADWIN 2000 enables carriers to accommodate capacity growth and maintain profitability through unparalleled price and excellent performance. The high-capacity radio system provides 100 Mbps net throughput (50 Mbps full duplex), with a flexible combination of Ethernet and up to 16 E1/T1 interfaces and a range of up to 120 km/75 miles.

To deliver optimal performance and unmatched robustness in all environments, RADWIN 2000 deploys advanced MIMO and OFDM technologies, together with built-in Diversity and RADWIN's proprietary air interface, built to deliver native TDM and high-quality Ethernet in sub-6GHz bands. The flexible multi-band radio supports multiple frequency bands over a single platform, granting utmost field flexibility and simple stock management.

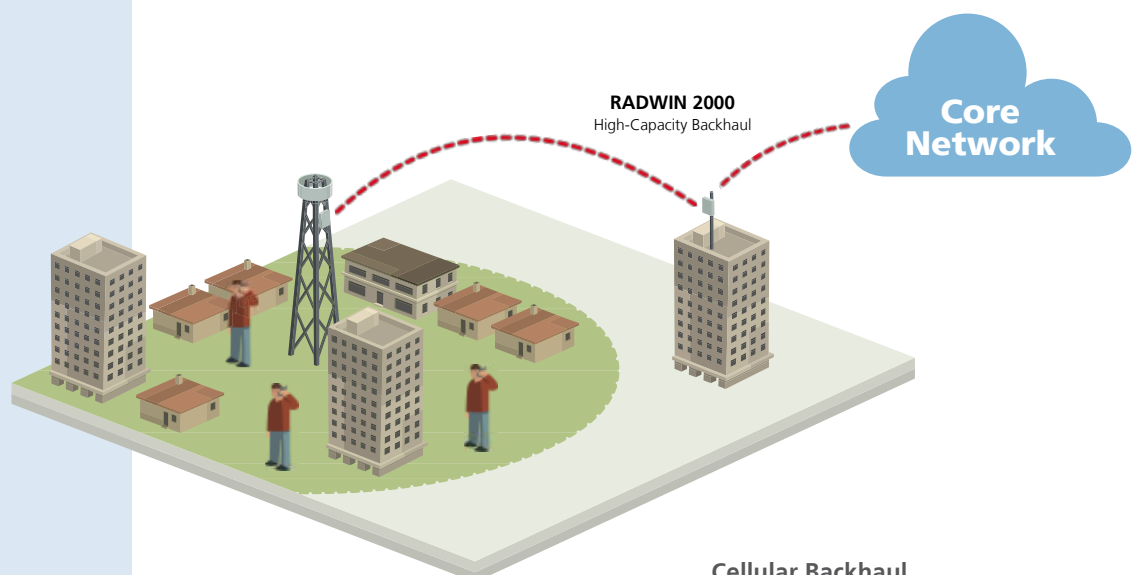

Cellular Backhaul

RADWIN 2000 Specifications

Typical Applications

RADWIN 2000 is the right solution for you, if you need a product that delivers more – increased capacity, extended range, carrier-class performance, enhanced flexibility and the latest radio technologies.

RADWIN 2000 is ideally suited for a range of applications including cellular backhaul, backhaul for IP and WiMAX networks and broadband wireless connectivity for large corporations and private networks demanding high capacity.

Configuration									
Architecture	ODU: Outdoor Unit with Integrated Antenna or Connectorized Unit for External Antenna IDU: Indoor Unit or PoE device								
IDU to ODU Interface	Outdoor CAT-5e cable								
Radio									
Capacity	100 Mbps net throughput (50 Mbps full duplex)								
Range	Up to 120 km/75 miles								
Frequency Bands	Multi-band radio supporting 2.300 – 2.500 GHz and 4.940 – 5.950 GHz								
Channel Bandwidth	20 MHz								
Tx Power	Max: 25 dBm Dynamic range: 35dB, configurable by RADWIN Manager								
Adaptive Modulation & Coding	Supported								
Automatic Channel Selection	Supported								
Duplex Technology	TDD								
Error Correction	FEC k = 1/2, 2/3, 3/4, 5/6								
Encryption	AES 128								
Radio Parameters									
Modulation	2x2 MIMO, OFDM								
	BPSK		QPSK		16QAM		64QAM		
FEC Rate	1/2	1/2	3/4	1/2	3/4	2/3	3/4	5/6	
Maximum Air Rate [Mbps]	13	26	39	52	78	104	117	130	
Sensitivity (dBm) @BER <10e-11 (20MHz)	-88	-86	-83	-81	-77	-72	-70	-67	
TDM Interface									
Number of Ports	Up to 16								
Type	E1/T1 configurable by RADWIN Manger								
Framing	Unframed (transparent)								
Timing	Independent timing per port, Tx and Rx								
Connector	RJ-45								
Standards Compliance	ITU-T G.703, G.826								
Line Code	E1: HDB3 @ 2.048 Mbps, T1: B8ZS/AMI @ 1.544 Mbps								
Latency	Configurable: 5-20 msec (default: 8msec)								
Impedance	E1: 120Ω, balanced T1: 100Ω, balanced								
Jitter & Wander	According to ITU-T G.823, G.824								
Ethernet Interface									
Ethernet ports	2 in IDU; 1 in PoE device 10/100BaseT with Auto-Negotiation (IEEE 802.3u) Framing/Coding IEEE 802.3								
Impedance	100Ω								
SFP port	Supported in IDU (type FE)								
VLAN Support	VLAN transparent; Separate VLANs for service traffic and Management traffic								
Information Rate	Configurable in steps of 1Kbps								
Connector	RJ-45								
Maximum Frame Size	2048 Bytes								
Latency	3 msec (typical)								

